



公司简介/Company Profile


Liaosion Lighting is a professional LED lighting manufacturer based in Zhongshan, China, with over 10 years of experience in designing, producing, and customizing high-quality LED lighting solutions. Specializing in a wide range of products, including LED floodlights, LED high bay lights, LED solar street lights, and LED solar floodlights, we are committed to delivering energy-efficient, durable, and innovative lighting products tailored to meet the diverse needs of our global clients.

Our state-of-the-art manufacturing facility combines advanced technology with rigorous quality control processes to ensure every product meets international standards. Whether you need standard lighting solutions or customized designs, our team of experts works closely with you to provide products that align with your specific requirements.

At Liaosion Lighting, we pride ourselves on our ability to deliver high-performance, eco-friendly, and cost-effective lighting solutions for residential, commercial, and industrial applications. Our products are designed to offer superior brightness, long lifespan, and excellent weather resistance, making them ideal for both indoor and outdoor use.

With a strong focus on customer satisfaction, we offer comprehensive services, from product development to after-sales support. Our dedication to quality, innovation, and sustainability has earned us a reputation as a reliable partner in the global lighting industry.

Choose Liaosion Lighting for premium LED lighting solutions that illuminate your world with efficiency and style. Let us light up your projects with expertise you can trust.

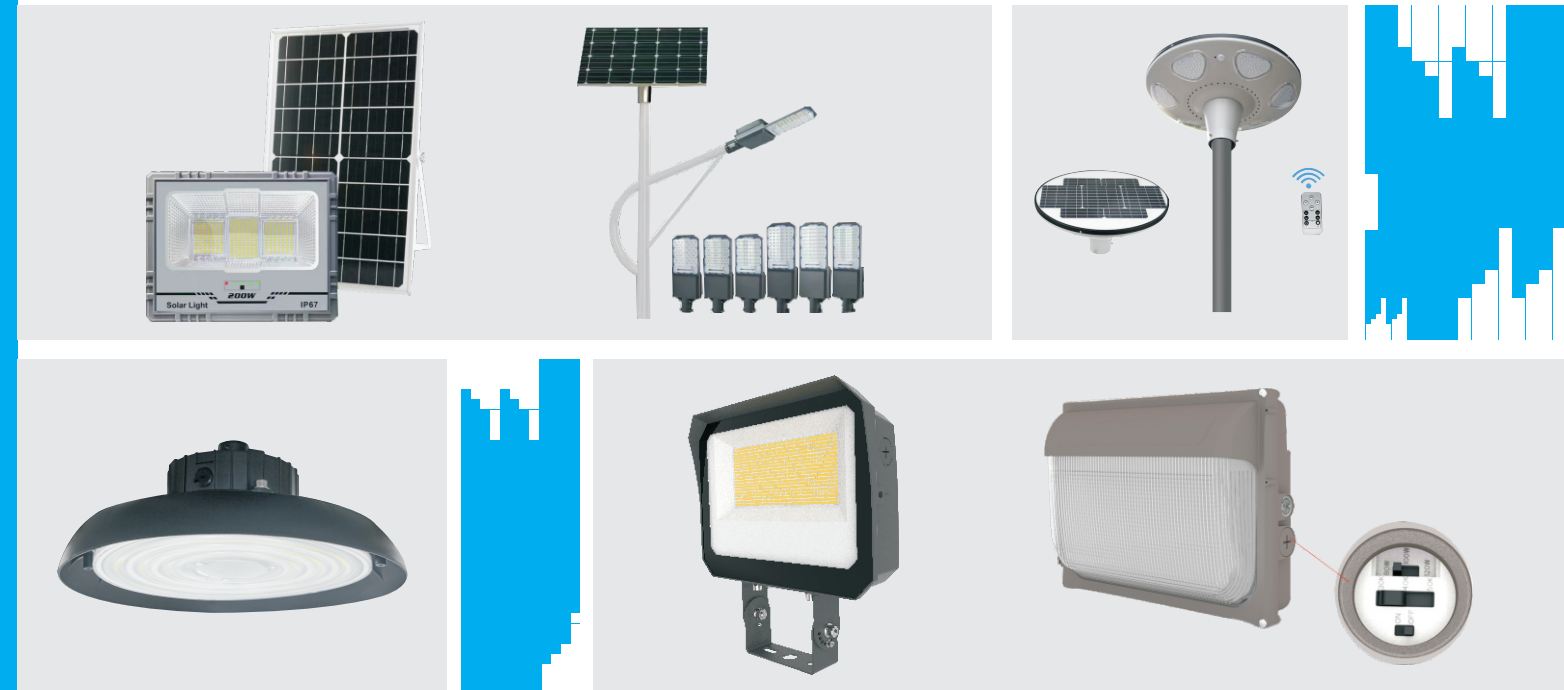

Shenzhen Liaosion Lighting Co.,LTD ● ● ● ● ● ● ● ●



Headquarter: Room 301, Building 1, No. 35, Chi'ao Industrial Zone, Jiangling Community, Malu Subdistrict, Pingshan District, Shenzhen, Guangdong Province, China.

Factory: Xinlishi industrial park, Lefeng 2 Road, Henglan Town, Zhongshan, Guangdong, China




+86-15390901539



info@liaosion.com



Whatsapp



wechat

UFO工矿灯UFO LED High Bay Light

Product Picture:



CE RoHS FC

CE RoHS FC

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CUFO01	100	120-140	3000-6000	>=80	100	AC100-277V	-20 to +50	20000/30000/50000	IP65	D29*H14
LS-CUFO01	150	120-140	3000-6000	>=80	100	AC100-277V	-20 to +50	20000/30000/50000	IP65	D33*H14
LS-CUFO01	200	120-140	3000-6000	>=80	100	AC100-277V	-20 to +50	20000/30000/50000	IP65	D36.5*H14

UFO工矿灯UFO LED High Bay Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CUFO02	60	150-190	3000-6000	>=80	60/90/120	AC100-277V	-20 to +50	20000/30000/50000	IP65	D20*H14.5
LS-CUFO02	100	150-190	3000-6000	>=80	60/90/120	AC100-277V	-20 to +50	20000/30000/50000	IP65	D24*H14.8
LS-CUFO02	150	150-190	3000-6000	>=80	60/90/120	AC100-277V	-20 to +50	20000/30000/50000	IP65	D28*H15.4
LS-CUFO02	200	150-190	3000-6000	>=80	60/90/120	AC100-277V	-20 to +50	20000/30000/50000	IP65	D32*H15.5
LS-CUFO02	240	150-190	3000-6000	>=80	60/90/120	AC100-277V	-20 to +50	20000/30000/50000	IP65	D36*H16.8
LS-CUFO02	300	150-190	3000-6000	>=80	60/90/120	AC100-277V	-20 to +50	20000/30000/50000	IP65	D36*H17.5
LS-CUFO02	500	150-190	3000-6000	>=80	60/90/120	AC100-277V	-20 to +50	20000/30000/50000	IP65	D44.9*H22.8

Product Picture:



UFO工矿灯UFO LED High Bay Light

Product Picture:



Product Parameter:

Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CUFO03	100	110-140	3000-6000	>=80	30/60/90	AC100-277V	-20 to +50	20000/30000/50000	IP65	26.3*26.3*4.5
LS-CUFO03	150	110-140	3000-6000	>=80	30/60/90	AC100-277V	-20 to +50	20000/30000/50000	IP65	31.4*31.4*4.5
LS-CUFO03	200	110-140	3000-6000	>=80	30/60/90	AC100-277V	-20 to +50	20000/30000/50000	IP65	31.4*31.4*4.5

UFO工矿灯UFO LED High Bay Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CUFO04	100	140-180	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D25.3*H10.3
LS-CUFO04	150	140-180	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D28.3*H11.7
LS-CUFO04	200	140-180	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D31.4*H12.3

Product Picture:



UFO工矿灯UFO LED High Bay Light

Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CUFO05	100	150	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D28.5*H15.1
LS-CUFO05	150	150	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D33*H15.4
LS-CUFO05	200	150	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D37.7*H16.1

UFO工矿灯UFO LED High Bay Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CUFO06	100	110-120	6000	>=80	90	AC180-256V	-20 to +50	20000/30000/50000	IP65	24.5*24.5*13
LS-CUFO06	150	110-120	6000	>=80	90	AC180-256V	-20 to +50	20000/30000/50000	IP65	29*29*13
LS-CUFO06	200	110-120	6000	>=80	90	AC180-256V	-20 to +50	20000/30000/50000	IP65	33*33*13
LS-CUFO06	300	110-120	6000	>=80	90	AC180-256V	-20 to +50	20000/30000/50000	IP65	36.5*36.5*13

Product Picture:



UFO工矿灯UFO LED High Bay Light

Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CUFO08	30	150-190	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D33*H44.5
LS-CUFO08	50	150-190	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D33*H44.5
LS-CUFO08	100	150-190	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D33*H44.5

UFO工矿灯UFO LED High Bay Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CUFO10	40	100-130	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D41*H41.5
LS-CUFO10	60	100-130	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D41*H41.5
LS-CUFO10	80	100-130	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	D41*H41.5

Product Picture:



球场灯 LED Stadium Light



Product Picture:



Product Parameter:

Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC01	300	120	5700	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP67	36.6*31.1*14.2
LS-CQC01	500	120	5700	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP67	36.6*31.1*14.2



球场灯 LED Stadium Light



Product Parameter:




Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC02	100	120	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	40*10*18
LS-CQC02	200	120	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	40*20.5*18
LS-CQC02	300	120	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	40*30.5*18
LS-CQC02	400	120	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	35*41*18
LS-CQC02	500	120	3000-6000	>=80	90	AC100-277V	-20 to +50	20000/30000/50000	IP65	35*51.5*18

Product Picture:



Upgraded adjustable angle bracket

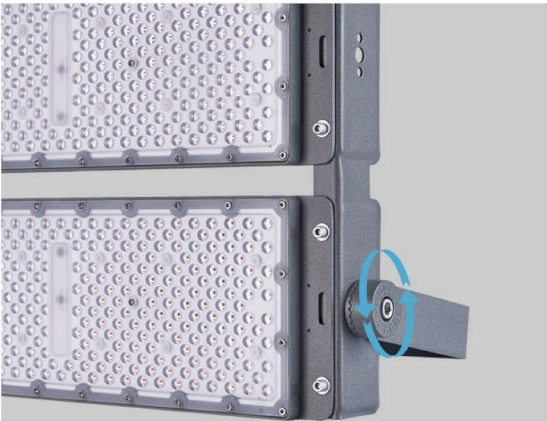

球场灯 LED Stadium Light



Product Picture:



Product Parameter:

Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (lm/瓦)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC03	500	150	3000-6000	>=80	30/60	AC100-277V	-20 to +50	20000/30000/50000	IP65	51*32.6*17
LS-CQC03	1000	150	3000-6000	>=80	30/60	AC100-277V	-20 to +50	20000/30000/50000	IP65	51*57*17
LS-CQC03	1500	150	3000-6000	>=80	30/60	AC100-277V	-20 to +50	20000/30000/50000	IP65	51*81.3*17
LS-CQC03	2000	150	3000-6000	>=80	30/60	AC100-277V	-20 to +50	20000/30000/50000	IP65	51*105.6*17



球场灯 LED Stadium Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (lm/瓦)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC04	300	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	43.8*43.4*35.6
LS-CQC04	400	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	43.8*43.4*35.6
LS-CQC04	500	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	59.2*50.9*42.3
LS-CQC04	600	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	59.2*50.9*42.3
LS-CQC04	800	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	69.7*64.9*52
LS-CQC04	900	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	69.7*64.9*52
LS-CQC04	1000	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	69.7*64.9*52
LS-CQC04	1200	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	69.7*64.9*52
LS-CQC04	1400	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	83.1*77.2*57
LS-CQC04	1600	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	83.1*77.2*57
LS-CQC04	1800	140-160	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	83.1*77.2*57

Product Picture:



球场灯 LED Stadium Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC07	100	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	40.9*32*10
LS-CQC07	200	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	53.2*32*10
LS-CQC07	300	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	65.8*32*10
LS-CQC07	400	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	78.4*32*10

球场灯 LED Stadium Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC06	250	170	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	59*20*24
LS-CQC06	500	170	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	63*37.5*24
LS-CQC06	750	170	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	63*37.5*24
LS-CQC06	1000	170	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	63*68.5*24
LS-CQC06	1250	170	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	63*84*24
LS-CQC06	1500	170	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	63*90*24

Product Picture:



球场灯 LED Stadium Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (v)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC08	300	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	42*40*32.5
LS-CQC08	600	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	62*57.5*22.5
LS-CQC08	800	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	70.5*63.5*26.5
LS-CQC08	1000	100-130	3000-6000	>=80	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	78.5*71.5*30

球场灯 LED Stadium Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (v)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CQC09	250	140-160	3000-6000	>=70	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	58*12.3*13.8
LS-CQC09	500	140-160	3000-6000	>=70	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	58*25*13.8
LS-CQC09	750	140-160	3000-6000	>=70	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	58*37.8*13.8
LS-CQC09	1000	140-160	3000-6000	>=70	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	58*50.5*13.8
LS-CQC09	1250	140-160	3000-6000	>=70	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	58*63.2*13.8
LS-CQC09	1500	140-160	3000-6000	>=70	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	58*76*13.8
LS-CQC09	2000	140-160	3000-6000	>=70	50	AC100-277V	-20 to +50	20000/30000/50000	IP65	58*101.3*13.8

Product Picture:



LED 投光灯LED Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD02	50	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	24.2*20.2*5.8
LS-CTGD02	100	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	29.7*24.5*6.5
LS-CTGD02	150	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	34.3*29.7*6.5
LS-CTGD02	200	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	34.3*29.7*6.5
LS-CTGD02	300	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	42*31.5*7.5
LS-CTGD02	400	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	52.8*34.6*8.5
LS-CTGD02	500	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	62.8*35.7*8.7
LS-CTGD02	600	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	62.8*35.7*8.7
LS-CTGD02	800	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	97*36*10
LS-CTGD02	1000	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	97*36*10

LED 投光灯LED Flood Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD01	30	160	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	20.5*17.5*5.2
LS-CTGD01	50	160	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	24.5*21.5*5.5
LS-CTGD01	100	160	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	30.5*26.6*6.5
LS-CTGD01	150	160	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	28*32.5*5.5
LS-CTGD01	200	160	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	37.5*31.5*9
LS-CTGD01	300	160	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	49.5*44.5*10

Product Picture:



LED 投光灯 LED Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD03	50	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	20*15.8*3.6
LS-CTGD03	100	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	28*22*3.6
LS-CTGD03	150	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	32*25*3.8
LS-CTGD03	200	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	37*28*3.8
LS-CTGD03	300	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	41*33*3.9

LED 投光灯 LED Flood Light




Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD04	10	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	10.3*8.3*2.3
LS-CTGD04	20	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	13*10*2.3
LS-CTGD04	30	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	16*12.2*2.6
LS-CTGD04	50	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	20.5*16*2.8
LS-CTGD04	100	100	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	27*21*3

Product Picture:

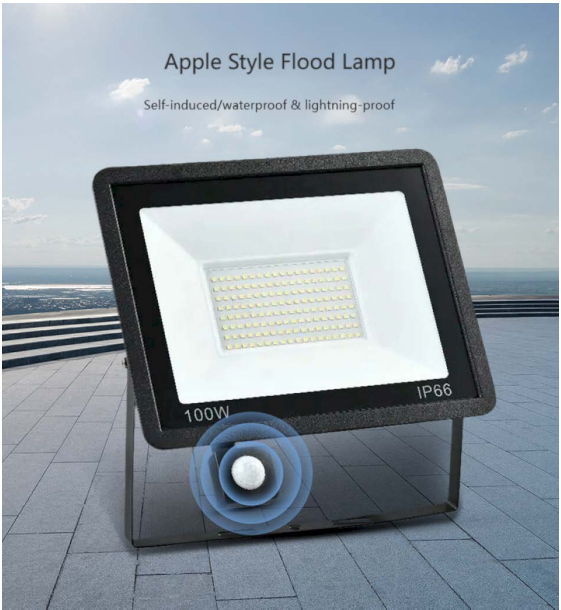

LED 投光灯 LED Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD05	50	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	18*16.5*2.5
LS-CTGD05	100	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	23.8*21.7*2.5
LS-CTGD05	150	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	29.6*27*2.5
LS-CTGD05	200	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	33.5*30.5*2.5
LS-CTGD05	300	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	37.8*34.5*3

LED 投光灯 LED Flood Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD06	30	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	15.9*17.6*3.4
LS-CTGD06	50	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	20.6*24.4*4
LS-CTGD06	100	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	25.8*30*4.1
LS-CTGD06	150	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	28.6*32.3*4.4
LS-CTGD06	200	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	32.5*36.5*4.9
LS-CTGD06	300	90-120	3000-6000	>=80	60/90	AC 85-265V	-20 to +50	20000/30000/50000	IP65	36.8*41.1*5.4

Product Picture:



LED 投光灯LED Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD08	50	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	20.5*16*2.5
LS-CTGD08	100	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	27*21*2.5
LS-CTGD08	150	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	32.9*24.8*2.5
LS-CTGD08	200	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	37.8*28*2.5
LS-CTGD08	300	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	42.5*31.5*2.7

LED 投光灯LED Flood Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD07	10	110-120	3000-6500	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	9.9*8.5*2.1
LS-CTGD07	20	110-120	3000-6500	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	11.8*10.3*2.1
LS-CTGD07	30	110-120	3000-6500	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	15.6*13.5*2.6
LS-CTGD07	50	110-120	3000-6500	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	19.1*16.4*3
LS-CTGD07	100	110-120	3000-6500	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	23.1*19.8*3
LS-CTGD07	150	110-120	3000-6500	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	26.7*22.9*3
LS-CTGD07	200	110-120	3000-6500	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	38.6*36.4*3.1

Product Picture:



Product Introduction



LED 投光灯LED Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD09	30	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	15.8*18*3.2
LS-CTGD09	50	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	18.6*21.7*3.4
LS-CTGD09	100	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	22.5*25.8*3.4
LS-CTGD09	150	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	27.2*28.4*3.5
LS-CTGD09	200	110-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	31.4*32*3.5

LED 投光灯LED Flood Light





Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD10	10	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	10.2*8.2*2.6
LS-CTGD10	20	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	12.2*9.9*2.6
LS-CTGD10	30	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	15.2*12.2*2.8
LS-CTGD10	50	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	18.7*15.2*2.9
LS-CTGD10	75	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	21.7*17.7*3.1
LS-CTGD10	100	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	25.5*20.5*3.5
LS-CTGD10	150	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	31.6*25.6*3.7
LS-CTGD10	200	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	36.6*29.6*3.8
LS-CTGD10	300	90-110	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	40.6*33*4



Product Picture:

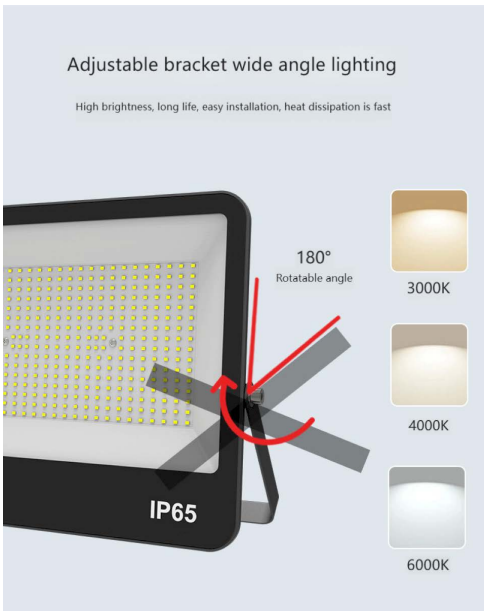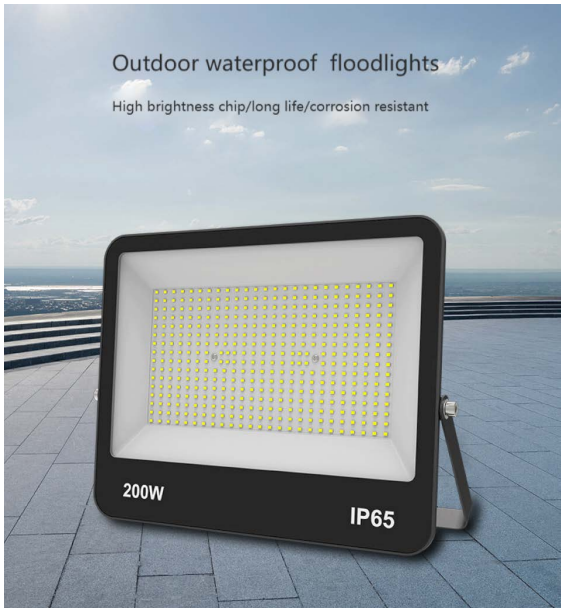

LED 投光灯LED Flood Light



Product Picture:

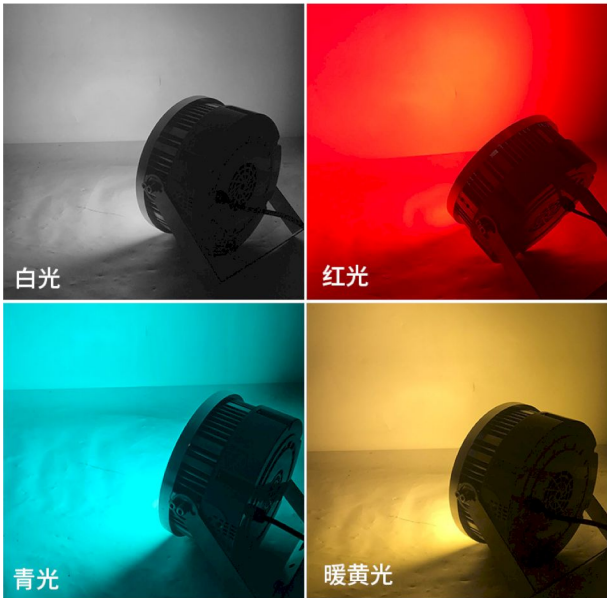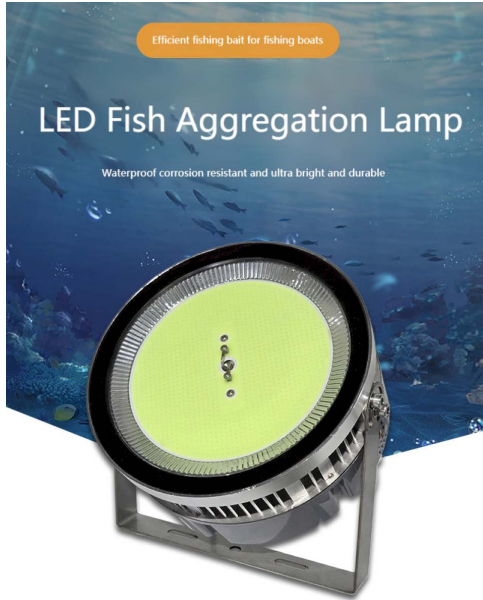

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD12	500	100-130	3000-6000	>=80	120	AC110-315V	-20 to +50	20000/30000/50000	IP65	23.9*31.8*6.8
LS-CTGD12	1000	100-130	3000-6000	>=80	120	AC110-315V	-20 to +50	20000/30000/50000	IP65	33*31**7.1

LED 投光灯LED Flood Light




Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD11	50	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	26.2*33.6*5.2
LS-CTGD11	100	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	31.7*33.6*5.2
LS-CTGD11	150	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	37.7*33.6*5.2
LS-CTGD11	200	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	42.7*33.6*5.7
LS-CTGD11	300	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	45.4*45*6

Product Picture:

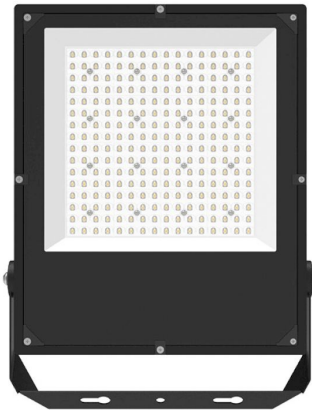

LED 投光灯 LED Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度 (°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD13	50	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	26.3*22.4*4.5
LS-CTGD13	100	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	31.5*26.9*5
LS-CTGD13	150	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	37*32.2*5.6
LS-CTGD13	200	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	41.6*35.2*5.8
LS-CTGD13	300	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	48.1*40.8*6
LS-CTGD13	400	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	49*52*6.5

LED 投光灯 LED Flood Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度 (°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD14	50	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	19*22*4.5
LS-CTGD14	100	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	23*27*5
LS-CTGD14	200	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	27*31*5
LS-CTGD14	300	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	32.5*36*5
LS-CTGD14	400	120-140	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	36*40*5

Product Picture:



LED 投光灯 LED Flood Light



Product Picture:




LED 投光灯 LED Flood Light



Scale design for efficient heat dissipation

The bottom plate is in close contact with the light source, greatly increasing the heat dissipation area. Accelerate heat dissipation and enhance the service life of lighting fixtures.

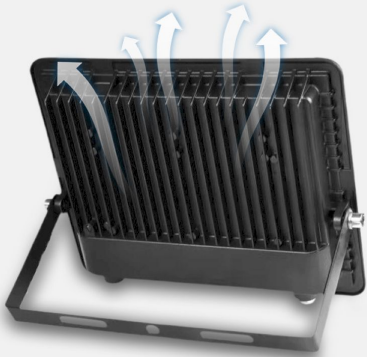

Strong tempered glass, not fragile
Long lifespan, softer lighting



Adjustable bracket

Adjustable freely, 180 degrees, easy and convenient to operate



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CTGD15	10	100-120	3000-6000	>=80	180	AC 85-265V	-20 to +50	20000/30000/50000	IP66	11*7.5*2.5
LS-CTGD15	20	100-120	3000-6000	>=80	180	AC 85-265V	-20 to +50	20000/30000/50000	IP66	12.7*9*3
LS-CTGD15	30	100-120	3000-6000	>=80	180	AC 85-265V	-20 to +50	20000/30000/50000	IP66	15.8*11.5*3
LS-CTGD15	50	100-120	3000-6000	>=80	180	AC 85-265V	-20 to +50	20000/30000/50000	IP66	19.8*15.3*3.2
LS-CTGD15	100	100-120	3000-6000	>=80	180	AC 85-265V	-20 to +50	20000/30000/50000	IP66	25.3*19.5*3.7
LS-CTGD15	150	100-120	3000-6000	>=80	180	AC 85-265V	-20 to +50	20000/30000/50000	IP66	31*23.2*4


太阳能投光灯 Solar Flood Light



Product Picture:



The five main characteristics

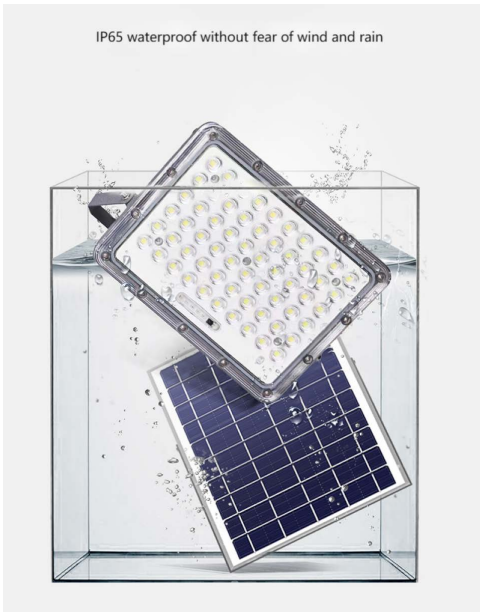

IP65 waterproof without fear of wind and rain

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD01	50	>400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	19.5*15.2*4
LS-CSTGD01	100	>600lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	23*17.2*4
LS-CSTGD01	200	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	26.7*19*4.5
LS-CSTGD01	300	>1400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	30.5*20.8*4.5
LS-CSTGD01	400	>1800lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	35*26.5*4.5

太阳能投光灯 Solar Flood Light




Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD02	100	>600lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	25.2*19*4
LS-CSTGD02	200	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	28.1*22*4
LS-CSTGD02	300	>1400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	31.2*24*4

Product Picture:

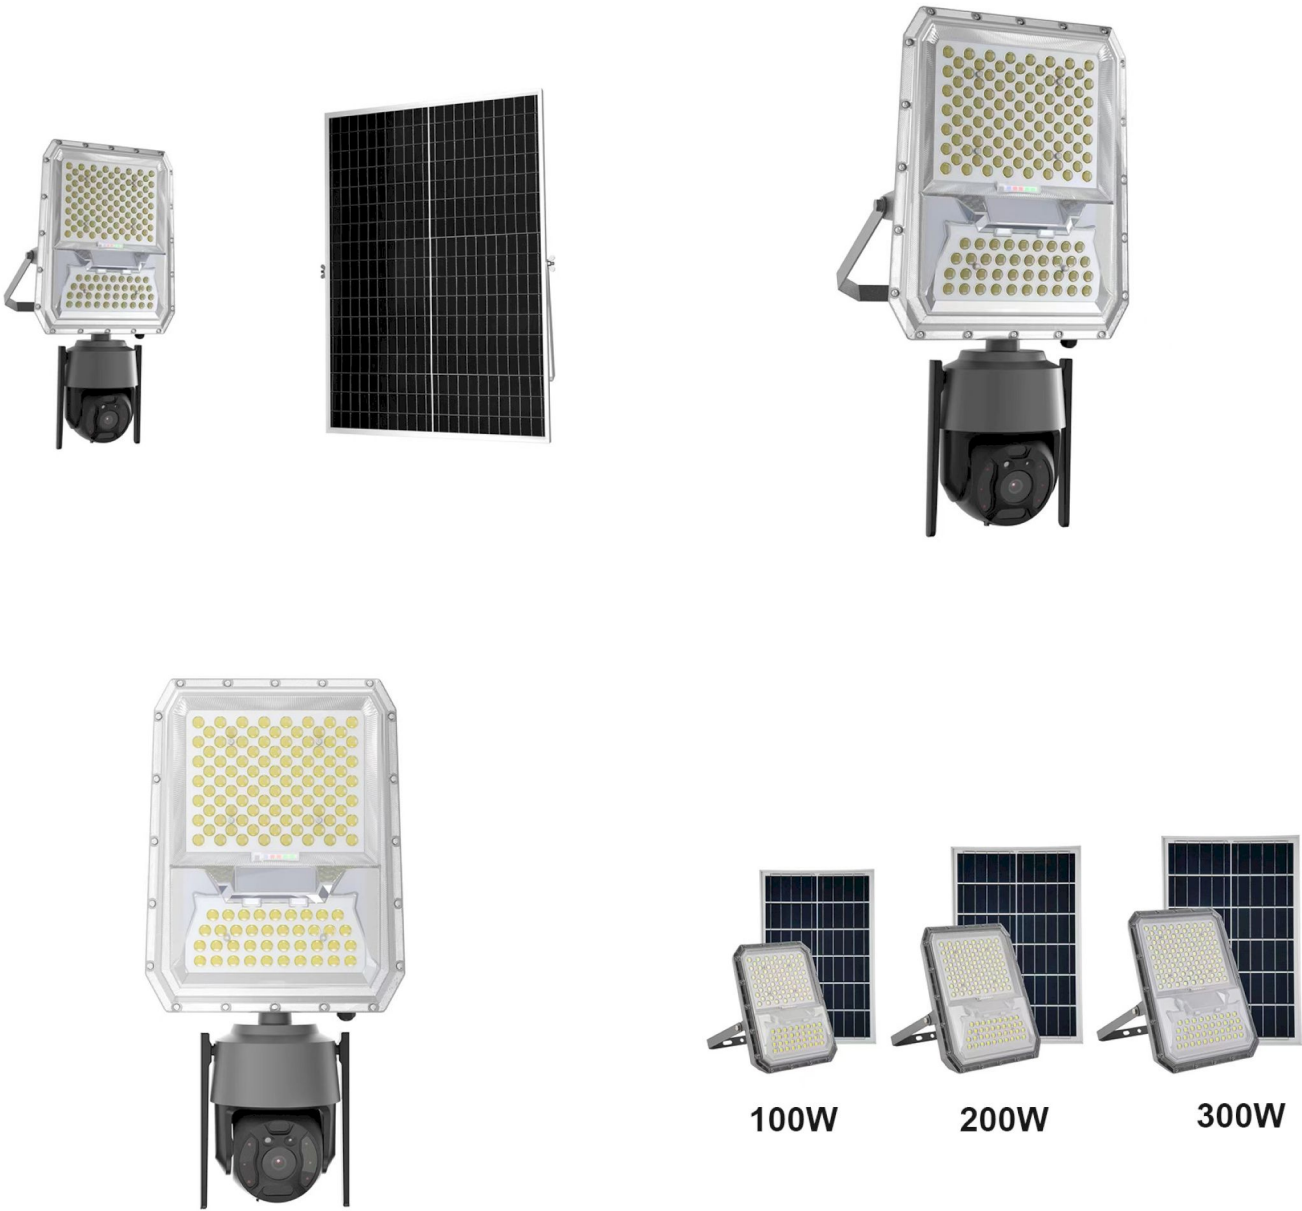

太阳能投光灯 Solar Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD03	40	>400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	23.2*18.5*5.3
LS-CSTGD03	60	>600lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	25.6*20.8*6.5
LS-CSTGD03	100	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	30.5*25*7.5
LS-CSTGD03	200	>1400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	35.7*27.6*8

太阳能投光灯 Solar Flood Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD04	100	>600lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	19*17*5.5
LS-CSTGD04	200	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	23*18*5.5
LS-CSTGD04	300	>1400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	29*23.5*5.5
LS-CSTGD04	500	>2000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	36.3*26*5.6

Product Picture:



太阳能投光灯 Solar Flood Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD05	100	>600lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	20*25*5
LS-CSTGD05	150	>800lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	22.9*29.4*5
LS-CSTGD05	200	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	25.3*33.3*5
LS-CSTGD05	300	>1400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	27.7&37.2*6
LS-CSTGD05	500	>1800lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	38.8*40.8*6
LS-CSTGD05	1000	>2000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	36.1*51.2*6

太阳能投光灯 Solar Flood Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD06	50	>400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	18.6*15.8*5.2
LS-CSTGD06	120	>700lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	22.2*17.1*5.2
LS-CSTGD06	150	>800lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	27.8*21.9*5.2
LS-CSTGD06	200	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	35.1*24.6*6

Product Picture:



太阳能投光灯 Solar Flood Light

LIAOSION
辽 胜 照 明

Product Picture:



Solar light

Day and night automatically light on/OFF

Light control + remote control 4-6H fully charged



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD07	100	>600lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	25.2*18.2*6.2
LS-CSTGD07	200	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	29.2*22.2*6.2
LS-CSTGD07	300	>1400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	33*26*6.2
LS-CSTGD07	400	>1800lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	37*30*6.2

太阳能投光灯 Solar Flood Light

LIAOSION
辽 胜 照 明

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度 (°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSTGD08	50	>400lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	19*16*6
LS-CSTGD08	100	>600lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	22*18*6
LS-CSTGD08	150	>800lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	28*22*6
LS-CSTGD08	200	>1000lm	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	35*25*6

Product Picture:



Fully automatic light control all the day

Solar charging during the day, automatic lighting at night



Sunrise automatically shuts off



Day and night automatically light up




Solar light

Automatically light on/off during day and night

Light control + remote control 6-8H fully charged

High conversion rate solar panels

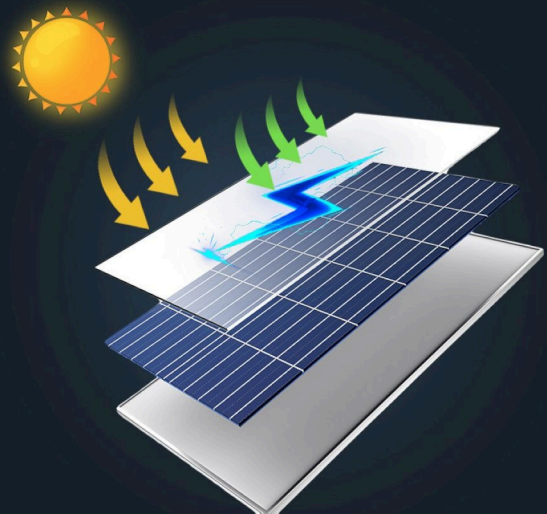

路灯 LED Street Light

Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD01	100	130-160	3000-6000	>=80	135	AC 85-265V	-20 to +50	20000/30000/50000	IP65	42.1*25*6.05
LS-CLD01	150	130-160	3000-6000	>=80	135	AC 85-265V	-20 to +50	20000/30000/50000	IP65	42.1*25*6.05
LS-CLD01	200	130-160	3000-6000	>=80	135	AC 85-265V	-20 to +50	20000/30000/50000	IP65	47.3*28*6.05
LS-CLD01	250	130-160	3000-6000	>=80	135	AC 85-265V	-20 to +50	20000/30000/50000	IP65	47.3*28*6.05
LS-CLD01	300	130-160	3000-6000	>=80	135	AC 85-265V	-20 to +50	20000/30000/50000	IP65	53.7*33.8*6


路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD02	50	100-120	3000-6000	>=80	70/140	AC 85-265V	-20 to +50	20000/30000/50000	IP65	49.8*16.8*8.2
LS-CLD02	100	100-120	3000-6000	>=80	70/140	AC 85-265V	-20 to +50	20000/30000/50000	IP65	60.2*20*9.45
LS-CLD02	150	100-120	3000-6000	>=80	70/140	AC 85-265V	-20 to +50	20000/30000/50000	IP65	67.8*22*9.45
LS-CLD02	200	100-120	3000-6000	>=80	70/140	AC 85-265V	-20 to +50	20000/30000/50000	IP65	77.8*25.1*9.65

Product Picture:

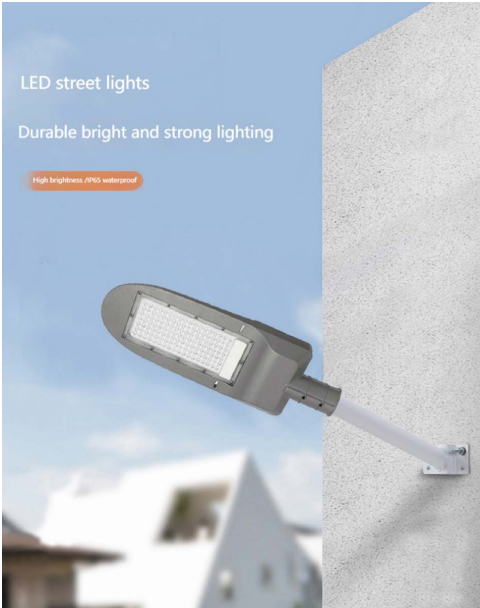


路灯 LED Street Light

Product Picture:



High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye

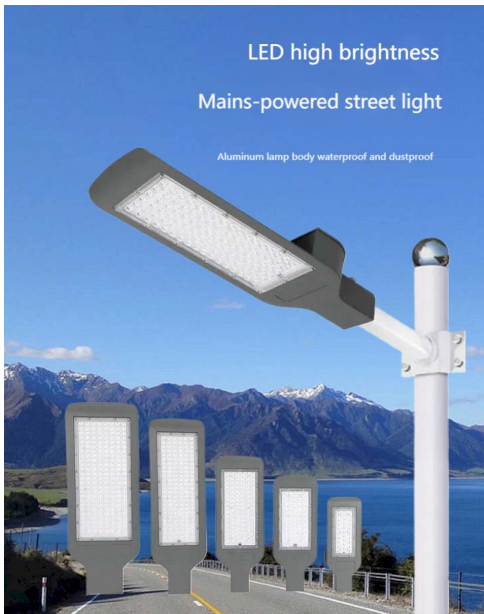

Product Parameter:

Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD03	30	110-150	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	32.5*11.5*5.5
LS-CLD03	50	110-150	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	40*15*6.5
LS-CLD03	100	110-150	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	46.5*16.5*6.5
LS-CLD03	150	110-150	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	58.5*18*7.5
LS-CLD03	200	110-150	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	62*22*7.5




路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD04	100	180	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	25.5*11.1*6.5
LS-CLD04	200	180	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	30.5*11.7*6.5
LS-CLD04	300	180	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	36*12.2*6.5

Product Picture:

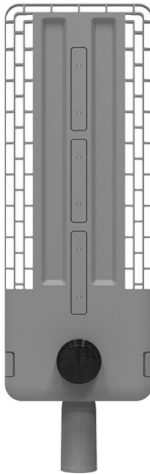

High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye



300W




200W




100W

路灯 LED Street Light

Product Picture:

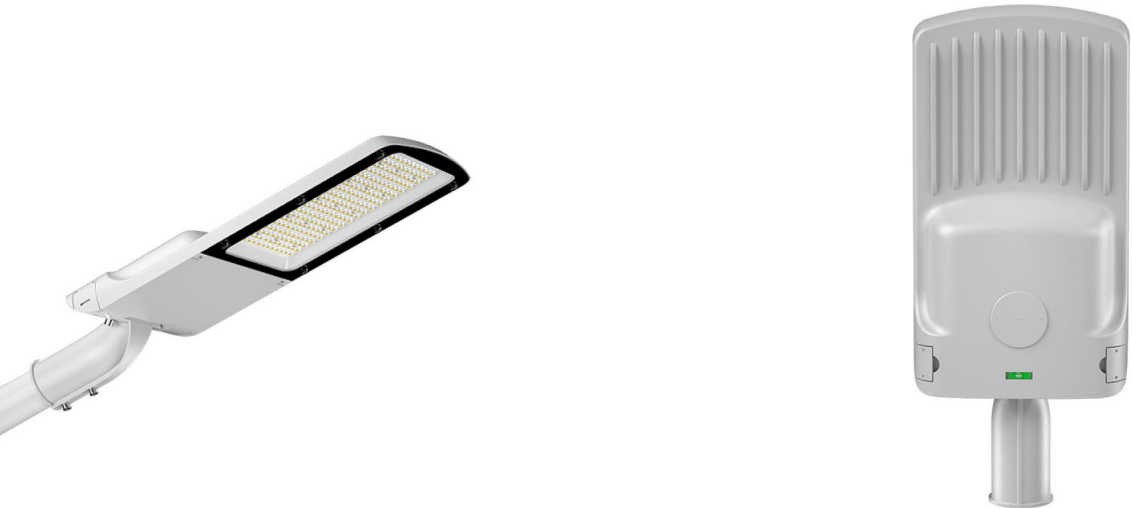

Product breakdown

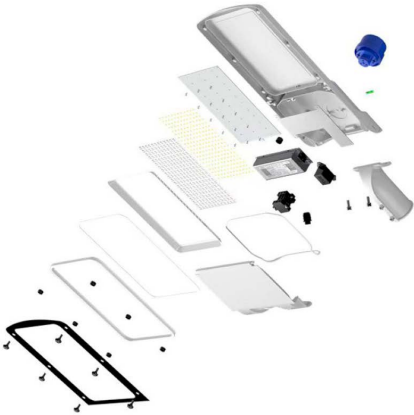

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD05	50	130	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	58.8*21*11
LS-CLD05	100	130	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	60*25.8*11
LS-CLD05	150	130	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	70*25.8*11
LS-CLD05	200	130	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	70.5*30.8*11
LS-CLD05	300	130	3000-6000	>=80	60/75/90/160	AC 85-265V	-20 to +50	20000/30000/50000	IP65	78.8*33.5*11.5

路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD06	100	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	59.5*25.1*6
LS-CLD06	200	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	62.5*28.1*6
LS-CLD06	300	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	69.8*30.1*6.5

Product Picture:



路灯 LED Street Light

Product Picture:



LIAOSION
辽 胜 照 明

路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD08	50	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	46*12*7
LS-CLD08	100	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	51*14*7
LS-CLD08	150	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	58.1*16*7
LS-CLD08	200	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	64.1*18*7

Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD07	100	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	51.9*21*8
LS-CLD07	150	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	56.5*25*8
LS-CLD07	200	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	58.9*28*8
LS-CLD07	300	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	67.4*30*8.5
LS-CLD07	400	130	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	72.4*34*9



路灯 LED Street Light

Product Picture:



Product Parameter:

Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD09	100	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	59*34*12
LS-CLD09	150	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	67.5*34.5*12
LS-CLD09	200	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	74.5*34.5*12
LS-CLD09	250	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	83*34.5*12
LS-CLD09	300	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP66	90*34.5*12



路灯 LED Street Light

Product Parameter:




Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD10	50	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	40.8*23*10.6
LS-CLD10	100	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	50.8*23*10.5
LS-CLD10	150	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	60*25.7*10.8
LS-CLD10	200	100-120	3000-6000	>=80	120	AC 85-265V	-20 to +50	20000/30000/50000	IP65	71.9*30.3*12.1

Product Picture:




路灯 LED Street Light

Product Picture:

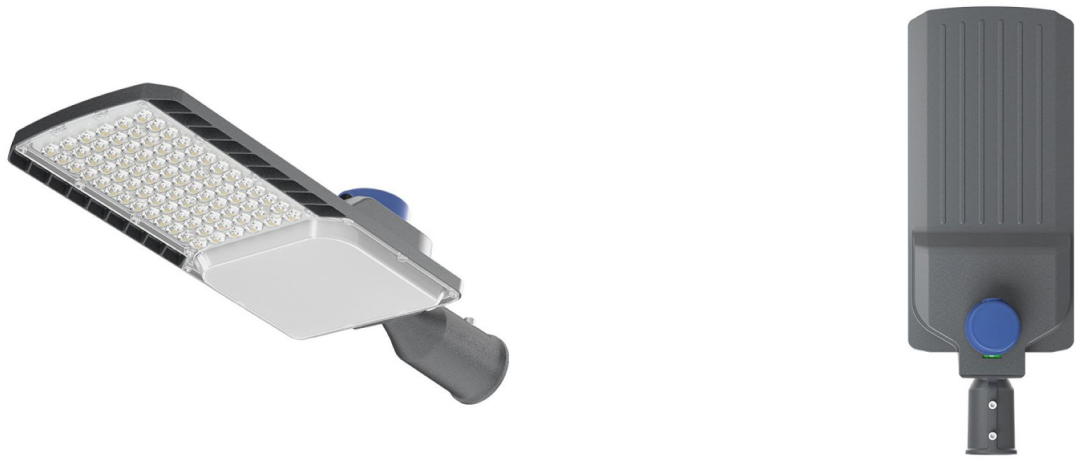

High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye

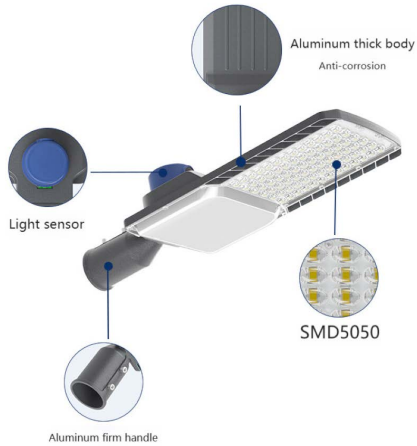

Product Parameter:

Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD11	30	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	38.2*16*7.5
LS-CLD11	50	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	47.6*17.5*7.5
LS-CLD11	100	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	55.7*22.1*7.5
LS-CLD11	150	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	65.1*24.1*7.5
LS-CLD11	200	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	75.1*27.6*7.5

路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD12	50	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	17.5*47.1*5.5
LS-CLD12	100	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	22.1*56.6*6
LS-CLD12	150	180-190	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	24.1*65.4*6.5

Product Picture:



High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye



路灯 LED Street Light



Product Picture:



路灯 LED Street Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CLD14	30	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	37.5*15.5*6.3
LS-CLD14	50	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	42*17.3*6.3
LS-CLD14	100	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	53*20*7.4
LS-CLD14	150	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	59*22.3*7.4
LS-CLD14	200	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	65.5*25.3*7.4

Product Picture:



High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CLD13	60	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	44.3*32.8*18.5
LS-CLD13	100	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	44.3*32.8*23.4
LS-CLD13	150	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	49.3*37.8*23.4
LS-CLD13	200	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	54.5*42.8*23.4

路灯 LED Street Light

Product Picture:



High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CLD15	50	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	47.8*18.8*6.9
LS-CLD15	100	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	55.5*21.4*6.9
LS-CLD15	150	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	62.4*24.3*6.9

路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CLD16	60	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	57.7*23.3*10.3
LS-CLD16	100	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	62.7*27.2*10.3
LS-CLD16	150	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	62.7*27.2*10.3
LS-CLD16	200	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	76.8*30.1*10.4

Product Picture:



High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye



路灯 LED Street Light

Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CLD17	30	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	38*17.2*6.2
LS-CLD17	50	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	42*20*7
LS-CLD17	100	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	49.5*21.5*8
LS-CLD17	150	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	54*21.5*8
LS-CLD17	200	130-140	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	60*23.5*8


路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CLD18	50	120-130	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	52*21*7
LS-CLD18	100	120-130	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	56*26*7
LS-CLD18	150	120-130	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	66*26*7
LS-CLD18	200	120-130	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	72*26*7

Product Picture:

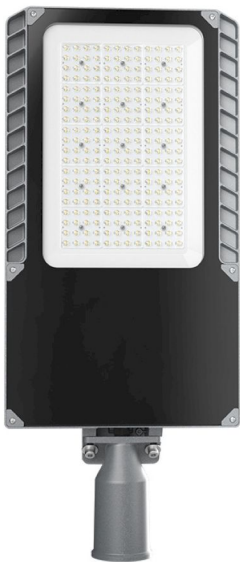

Human body sensation



路灯 LED Street Light

Product Picture:

100W Glass Type



Model	CS-LD-JY02	Size	334*273*57
Packaging	405 X 295 x 100	Weight	1823g

100W Lens Type



Model	CS-LD-JY02	Size	334*273*57
Packaging	405 x 295 x 100	Weight	1823g

150W Glass Type



Model	CS-LD-JY02	Size	434*273*57
Packaging	590 * 295 * 100	Weight	2365g

150W Lens type



Model	CS-LD-JY02	Size	434*273*57
Packaging	590 x 295 x 100	Weight	2365g

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD19	100	120-130	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	33.4*27.3*5.7
LS-CLD19	150	120-130	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	43.4*27.3*5.7

路灯 LED Street Light

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CLD20	50	150-160	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	56*19.6*9.9
LS-CLD20	100	150-160	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	61*24.5*9.9
LS-CLD20	150	150-160	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	66.1*24.5*9.9
LS-CLD20	200	150-160	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	71.2*30*9.9
LS-CLD20	240	150-160	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	71.4*34*9.7
LS-CLD20	300	150-160	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	71.4*34*9.7

Product Picture:



High-quality chip with strong performance

The light is mild and uniform without pinpointing the eye



Hotsale

太阳能路灯 Solar Street Light



Product Picture:



Product Parameter:



nber	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSLD01	400	1950	3000-6000	>=80	70/145	AC100-277V	-20 to +50	20000/30000/50000	IP65	L125.6*W 42.9
LS-CSLD01	500	2600	3000-6000	>=80	70/145	AC100-277V	-20 to +50	20000/30000/50000	IP65	L125.6*W 42.9
LS-CSLD01	600	3600	3000-6000	>=80	70/145	AC100-277V	-20 to +50	20000/30000/50000	IP65	L180.6*W 42.9
LS-CSLD01	700	4550	3000-6000	>=80	70/145	AC100-277V	-20 to +50	20000/30000/50000	IP65	L204.6*W 42.9

太阳能路灯 Solar Street Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSLD04	45	6750	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	99.8*37.3*15
LS-CSLD04	60	9000	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	123.3*37.3*15
LS-CSLD04	80	12000	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	154.3*37.3*15
LS-CSLD04	100	15000	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	186.3*37.3*15
LS-CSLD04	120	18000	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	220.8*37.3*15

Product Picture:



太阳能路灯 Solar Street Light



Product Picture:



Product Parameter:

Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSLD06	40	5100	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	83*38.5*6.8
LS-CSLD06	60	10200	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	139*38.5*6.8
LS-CSLD06	80	13600	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	153.5*38.5*6.8
LS-CSLD06	100	17300	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	169*38.5*6.8
LS-CSLD06	120	20400	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	180.5*38.5*6.8

太阳能路灯 Solar Street Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSLD07	10	2500	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	52.4*24*7.5
LS-CSLD07	20	3600	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	52.4*24*7.5
LS-CSLD07	30	4300	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	57*27*8
LS-CSLD07	40	5000	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	57*27*8


Product Picture:



太阳能路灯 Solar Street Light



Product Picture:

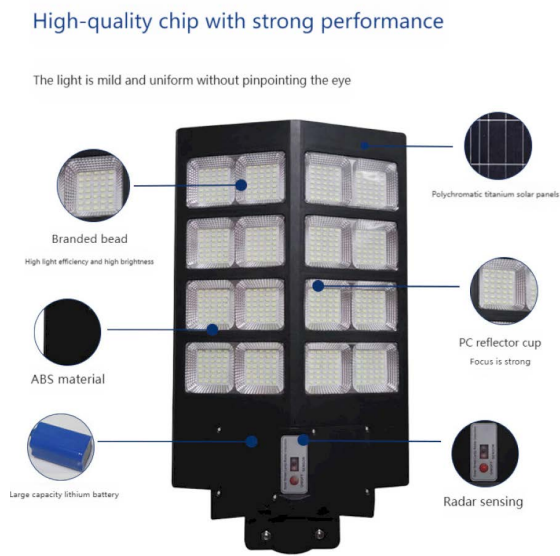

Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (v)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSLD10	18	2100	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	45*35*8
LS-CSLD10	20	3600	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	60*35*8
LS-CSLD10	25	4320	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	68*35*8

太阳能路灯 Solar Street Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效 (LM/W)	色温(K)	显色指数	发光角度(°)	输入电压 (v)	环境温度(℃)	寿命 (H)	防护等级	产品尺寸 (cm)
LS-CSLD11	30	5400	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	68.9*23.7*6.4
LS-CSLD11	40	7200	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	71.3*34.2*8.2

Product Picture:



太阳能路灯 Solar Street Light



Product Picture:



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CSLD19	8	1440	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	46.8*24*6.7
LS-CSLD19	12	2100	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	58.6*25.9*6.7
LS-CSLD19	20	2800	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP65	68.7*25.9*6.7

太阳能路灯 Solar Street Light



Product Parameter:



Part Number	Power(W)	Luminos Flux(lm/w)	CCT	CRI (Ra)	Beam Angle	Input Voltage	Ambient Temperature	Life Span(H)	Waterproof	Size L*W*H(cm)
型号	功率(W)	光效(LM/W)	色温(K)	显色指数	发光角度(°)	输入电压(V)	环境温度(°C)	寿命(H)	防护等级	产品尺寸(cm)
LS-CSLD21	150	4200	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP67	34.5*72.5*7.7
LS-CSLD21	200	4800	3000-6000	>=80	120	AC100-277V	-20 to +50	20000/30000/50000	IP67	34.5*89.7*7.7

Product Picture:



太阳能路灯 Solar Street Light



Product Picture:



Product Parameter:



型号Model	LS-CSLD22	LS-CSLD22	LS-CSLD22	LS-CSLD22	LS-CSLD22
光源LED chips / CRI	BridgeLux 3030 or 5054 / CRI> 70Ra or 80Ra				
功率Power	100W	150W	200W	300W	400W
光效Light efficiency	130LM/W-190LM/W				
光通量Luminous flux	>3200LM	>4800LM	>6400LM	>8000LM	>9600LM
色温CCT	3000K/ 4000K/ 5000K/ 6000K				
灯珠数量LED QTY	100/60pcs	150/90pcs	200/120pcs	300/180pcs	400/240pcs
IP / IK rate	IP65 / IK08				
安装高度Install height	4-8meters				
环境温度Operating temperature	-20℃~ 50℃				
透镜角度Beam angle:	70*145°				
太阳能板Solar panel	5V30W	5V40W	5V50W	5V60W	5V80W
电池Battery	3.2V25AH	3.2V30AH	3.2V40AH	3.2V50AH	3.2V60AH
充电/工作时间Charging /Work time	4-6hours / > 12hours				
功能Function	Light+Remote control+Radar				
使用寿命 Life-span	20000H/30000H				
产品尺寸Product size	546*366*84mm	760*366*84mm	746*416*88mm	908*416*88mm	1117*416*88mm
材质 Material	Aluminium+pc				
包装尺寸Packing size	66*41*13.5cm(1pcs)	88*41*13.5cm(1pcs)	86.5*47.5*14.5cm(1pcs)	101.5*47.5*14.5cm(1pcs)	130.5*47.5*14.5cm(1pcs)

太阳能路灯 Solar Street Light



Product Picture:



Product Parameter:



型号Model	LS-CSLD23
光源LED chips / CRI	Epistar 5054 / CRI> 70Ra or 80Ra
功率Power	200W
光效Light efficiency	110LM/W-160LM/W
光通量Luminous flux	>1200LM
色温CCT	3000K/ 4000K/ 5000K/ 6000K
灯珠数量LED QTY	80pcs
IP / IK rate	IP65 / IK08
安装高度Install height	5 meters
环境温度Operating temperature	-20℃~ 50℃
透镜角度Beam angle:	70*140°
太阳能板Solar panel	5V32W
电池Battery	3.2V25AH
充电/工作时间Charging /Work time	4-6hours / > 12hours
功能Function	Light+Remote control+Radar
使用寿命 Life-span	20000H
产品尺寸Product size	L810*W292*H85mm
材质 Material	Aluminium+PC
包装尺寸Packing size	82.5*30*11cm(1pcs)

太阳能路灯 Solar Street Light

Product Picture:



Product Parameter:



型号Model	LS-CSLD24	LS-CSLD24	LS-CSLD24	LS-CSLD24
光源LED chips / CRI	Epistar 5054 / CRI> 70Ra or 80Ra			
功率Power	100W	200W	300W	400W
光效Light efficiency	110LM/W-160LM/W			
光通量Luminous flux	>1200LM	>2400LM	>3600LM	>4550LM
色温CCT	3000K/ 4000K/ 5000K/ 6000K			
灯珠数量LED QTY	46pcs	69pcs	81pcs	88pcs
IP / IK rate	IP65 / IK08			
产品尺寸Product size	L510*W215*H80mm	L510*W215*H80mm	590*220*90mm	590*220*90mm
环境温度Operating temperature	-20℃~ 50℃			
透镜角度Beam angle:	120°			
太阳能板Solar panel	6V25W	6V30W	6V35W	6V40W
电池Battery	3.2V20AH	3.2V25AH	3.2V30AH	3.2V35AH
充电/工作时间Charging /Work time	4-6hours / > 12hours			
功能Function	Light+Remote control			
使用寿命 Life-span	20000H			
灯体包装尺寸Lamp body Packing size	52.5*22*9cm(1pcs)	52.5*22*9cm(1pcs)	61.5*49.5*24cm(5pcs)	61.5*49.5*24cm(5pcs)
材质 Material	Aluminium+pc			
太阳能板包装尺寸Solar panel Packing size	56.5*30*37.5cm(10pcs)	66*16.5*37.5cm(5pcs)	71*19*47cm(5pcs)	71*19.5*56.5cm(5pcs)

太阳能路灯 Solar Street Light

Product Picture:



Product Parameter:



型号Model	LS-CSLD25	LS-CSLD25	LS-CSLD25	LS-CSLD25	LS-CSLD25
光源LED chips / CRI	Epistar 3030 / CRI> 70Ra or 80Ra				
功率Power	60W	120W	180W	240W	300W
光效Light efficiency	110LM/W-160LM/W				
光通量Luminous flux	>3000LM	>3500LM	>4500LM	>3900LM	>4300LM
色温CCT	3000K/ 4000K/ 5000K/ 6000K				
灯珠数量LED QTY	60pcs				
IP / IK rate	IP65 / IK08				
产品尺寸Product size	L500*W210*H85mm				
环境温度Operating temperature	-20℃~ 50℃				
透镜角度Beam angle:	70*140°				
太阳能板Solar panel	6V25W	6V30W	6V40W	6V50W	6V70W
电池Battery	3.2V24AH	3.2V30AH	3.2V36AH	3.2V45AH	3.2V60AH
充电/工作时间Charging /Work time	4-6hours / > 12hours				
功能Function	Light+Remote control				
使用寿命 Life-span	20000H				
材质 Material	Aluminium+PC				
灯体包装尺寸Lamp body Packing size	50*22.5*54.5cm(5pcs)				
太阳能板包装尺寸Solar panel Packing size	56.5*30*37.5cm(10pcs)	66*16.5*37.5cm(5pcs)	71*19*47cm(5pcs)	71*19.5*56.5cm(5pcs)	69*74*33cm(1pcs)

太阳能庭院灯 Solar Garden Light



Product Picture:



Product Parameter:



型号Model	LS-CTY01	LS-CTY01	LS-CTY01	LS-CTY01
光源LED chips / CRI	BridgeLux 2835 / CRI> 70Ra or 80Ra			
功率Power	200W	300W	400W	500W
光效Light efficiency	110LM/W-160LM/W			
光通量Luminous flux	>2200LM	>2600LM	>3800LM	>4500LM
色温CCT	3000K/ 4000K/ 5000K/ 6000K			
灯珠数量LED QTY	312pcs	312pcs	416pcs	416pcs
IP / IK rate	IP65 / IK08			
安装高度Install height	4-6 meters			
环境温度Operating temperature	-20°C~ 50°C			
透镜角度Beam angle:	120°			
太阳能板Solar panel	6V20W	6V30W	6V40W	6V60W
电池Battery	3.2V20AH	3.2V30AH	3.2V40AH	3.2V60AH
充电/工作时间Charging /Work time	4-6hours / > 12hours			
功能Function	Light+Remote control			
使用寿命 Life-span	20000H			
产品尺寸Product size	D520H163mm	D520H163mm	D760H163mm	D760H163mm
材质 Material	Aluminium			
包装尺寸Packing size	57*57*40cm(1pcs)	57*57*40cm(1pcs)	80*80*25cm(1pcs)	80*80*25cm(1pcs)

太阳能庭院灯 Solar Garden Light



Product Picture:



Product Parameter:



型号Model	LS-CTY02	LS-CTY02	LS-CTY02
光源LED chips / CRI	Epistar5730 / CRI> 70Ra or 80Ra		
功率Power	30W	50W	80W
光效Light efficiency	110LM/W-160LM/W		
光通量Luminous flux	>1200LM	>1800LM	>2400LM
色温CCT	3000K/ 4000K/ 5000K/ 6000K		
灯珠数量LED QTY	216pcs	324pcs	450pcs
IP / IK rate	IP65 / IK08		
安装高度Install height	4-6 meters		
环境温度Operating temperature	-20°C~ 50°C		
透镜角度Beam angle:	120°		
太阳能板Solar panel	6V10W	6V15W	6V20W
电池Battery	3.2V6AH	3.2V10AH	3.2V20AH
充电/工作时间Charging /Work time	4-6hours / > 12hours		
功能Function	Light+Remote control		
使用寿命 Life-span	20000H		
产品尺寸Product size	D420H65mm	D550H60mm	D610H95mm
材质 Material	ABS		
包装尺寸Packing size	44.5*40*44.5cm(5pcs)	58*37*58cm(5pcs)	64*55.5*63.5cm(5pcs)